

LV-WIDE

Simple style, good lighting effect, stable pressure, simple and fashionable installation style. The beam angle 36 degrees to provide more lighting options. It quietly guards every inch of the bedroom when the night comes back.

TYPE


Spotlight - recessed



■ Technical Specification

	LV-WIDE-7w	LV-WIDE-12w
Power	7W	12W
Efficiency	90 lm/w	90 lm/w
Luminous flux [lm]	630	1080
CRI	>80	>80
Inbut Voltage	AC 85-265V	AC 85-265V
Beam Angle	36°	36°
Chip	COB Bridgelux	COB Bridgelux
Driver	isolated	isolated
Body Color	Black	Black
Dimension	D85*H55mm	D110*H70mm
Cut-out	75mm	100mm
EAN	6925222032704	6925222032711

■ Technical Drawing

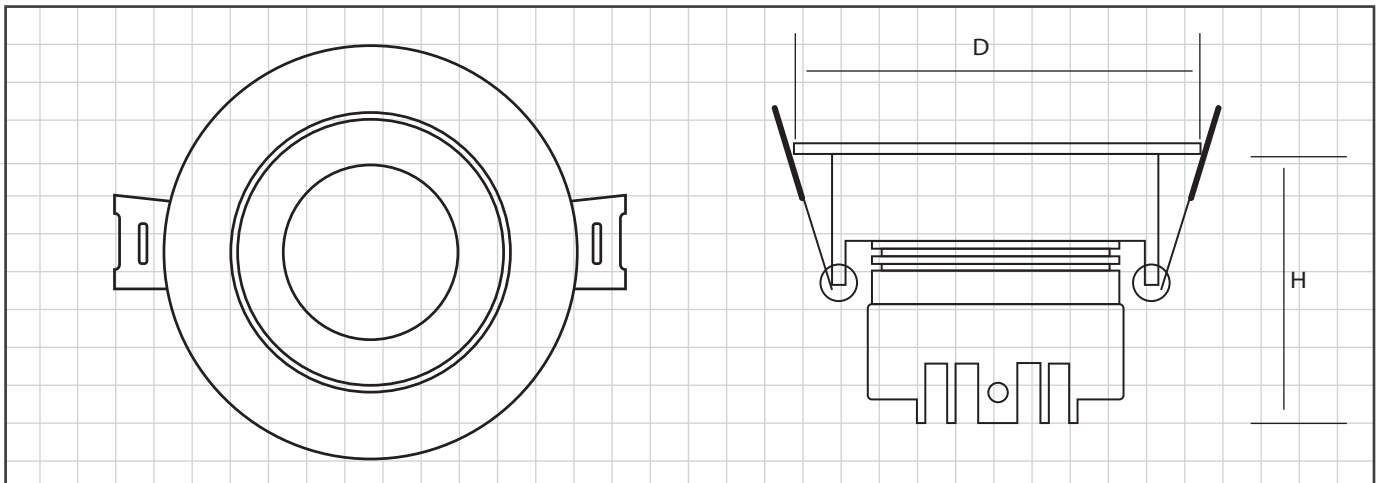

■ Features

Driver Brand Options



Chip Brand Options



36° Beam Angle



IP20



NO FLICKER



CCT (K)



3000K 4000K

Body color



Life Span
35000h



Efficiency
90 lm/w

Application



General Lighting



Show Room



Office



Healthcare



Education