

BE-CS725 - 10W



BE FLAT












BE-CS725 - 2*10W






BE-CS725 - 3*10W

■ Technical Specification

| Power | Dimension | EAN | CCT | CRI |
|-------|-----------------------------------------------------------------------------------------------------------------------|---------------|------------|-----|
| 10W | 10W (D120*120*H140mm)  90*90mm | 6925222026758 | 3000-6000K | >80 |
| 2*10W | 2*10W (D225*120*H140mm)  190*90mm | 6925222026741 | | |
| 3*10W | 3*10W (D310*120*H140mm)  280*90mm | 6925222026741 | | |
| 15W | 15W (D143*143*H160mm)  120*120mm | 6925222026772 | | |
| 2*15W | 2*15W (D250*143*H160mm)  220*120mm | 6925222026765 | | |
| 3*15W | 3*15W (D350*143*H160mm)  320*120mm | 6925222026789 | | |
| 30W | 30W (D180*180*H180mm)  150*150mm | 6925222026710 | | |
| 2*30W | 2*30W (D335*180*H180mm)  305*120mm | 6925222026734 | | |
| 3*30W | 3*30W (D485*180*H180mm)  455*120mm | 6925222026727 | | |

| | |
|---------------|-----------------------|
| Beam Angle | 15° / 24° |
| Color | Black/White |
| Inbut Voltage | AC 85-265V / 100-277V |

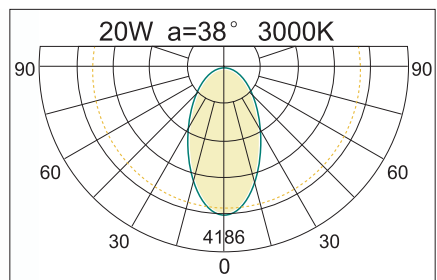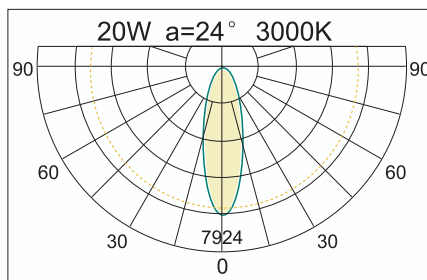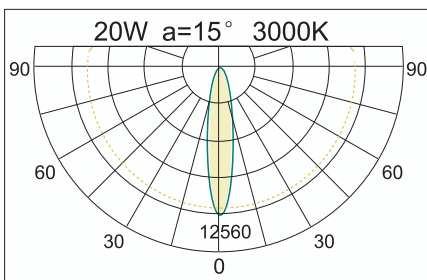

Driver Brand Options 

Chip Brand Options 

LEVANT  MW  MEAN WELL  DONE MOSO®  PHILIPS 
LIFUD  EAGLE RISE 


OSRAM  LUMILEDS  bridgelux  EPISTAR 
CREE  SAMSUNG 



IP20



NO FLICKER



6000K 4000K 3000K

Body color



Life Span
35000h

