

Hygienic Room Luminaires


Fixtures with high protection class are produced with specifications to be used in areas where cleaning is important.

Light coming from multi-LED source in fixtures passes through a sandblasted specially produced glass and provides an extremely soft and homogeneous distribution to the environment.

Fixture efficiency is brought to the forefront in the clear glass option. It is possible to produce according to all types of suspended ceilings.

Cooling from the body surface.

High efficiency Mid-Power LED.

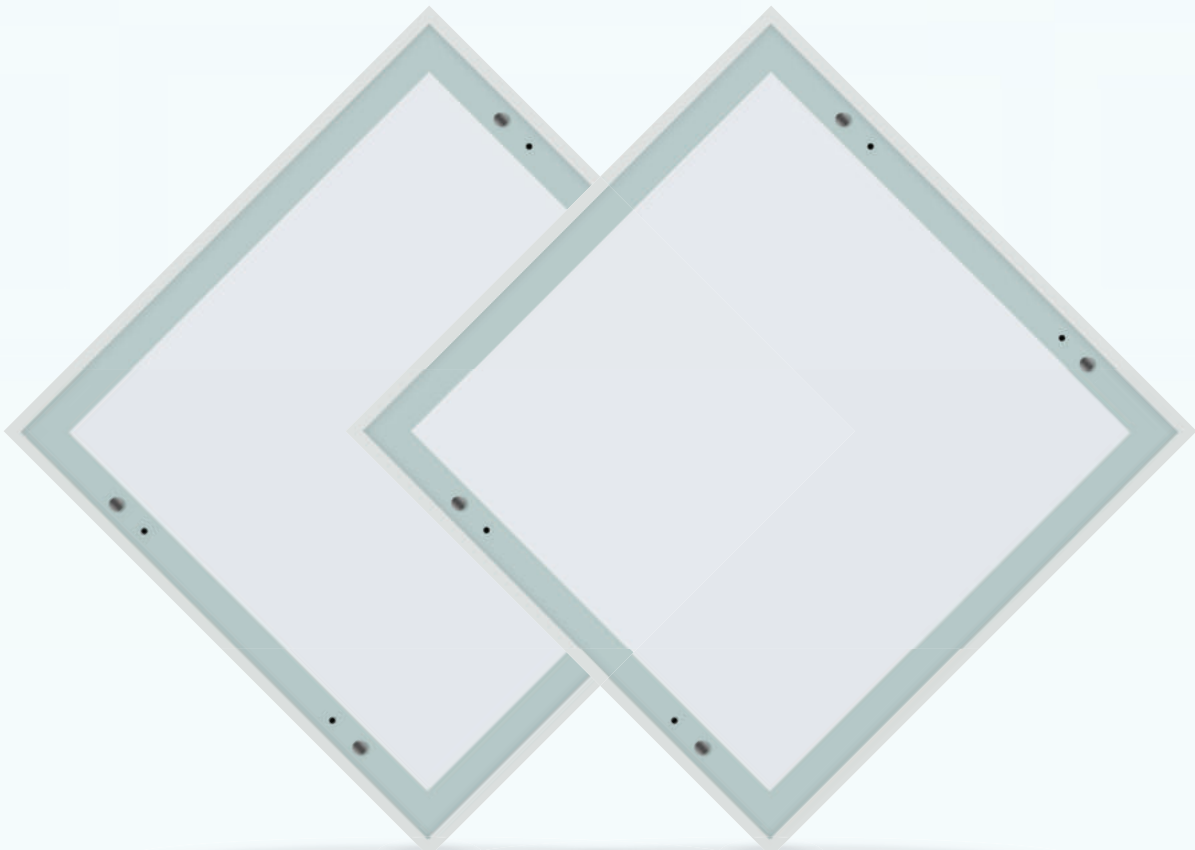



■ Materials

- Body 0,6mm thick A1 quality DKP steel sheet. 80-micron electrostatic powder painted.
- Glass 4mm thick Tempered glass 1,2mm opal
- Driver: Electronic Transformer
- Mounting Method: square Recessed
- Led Chip : Osram

OSRAM
Chip and Driver

■ Technical Specification

| Model | Power | Light flux | Input Voltage | IP | color | Weight | Box Dimension |
|-------|-------|---------------|----------------|----|-------|--------|---------------|
| LVC | 40w | 3750lm | AC 220 50Hz | 54 | white | 9KG | 62x62x13cm |
| | EAN | 6925222046114 | | | | | |

■ Applications



Manufacturing areas with high requirements in terms of hygiene and air purity.



Clinics



Laboratories




Healthcare



Hospitals



Dali option is available when requested



Life Span
35000h





