

LEVANT
Light

LV-LIT-T8




This product features a Cable Gland of size M20, constructed with a sturdy metal board. The wiring arrangement is designed for single-ended connectivity. It holds an IP65 rating for protection against dust and water ingress, while also boasting an IK08 rating for its ability to withstand impacts. The product comes with a reassuring -3 year warranty and offers a commendable operational lifespan of 25,000 hours. It can function seamlessly within a temperature range of -25°C to +40°C and is built with anti-UV materials, ensuring resilience to prolonged sun exposure. The Terminal Block is equipped with a faster connector to simplify the wiring process, and the connection is intended to be made on one side. For added protection during transit, the product is packaged in a color sleeve along with two pieces of 2mm-thick foam, ensuring safe delivery and intact condition upon arrival.

■ Technical Specification

LV-LIT-T8

Cable gland :	M20
input voltage :	AC 110 - 270V
IP:	IP65
IK:	IK08
Ambient temperature :	-25 ~ +40 ° C - anti uv material
Terminal block :	Faster connector connection on one side
Material :	Metal board , PC
Dimensions :	126.8x9.5x7cm
EAN :	6925222081801

■ Technical Drawing

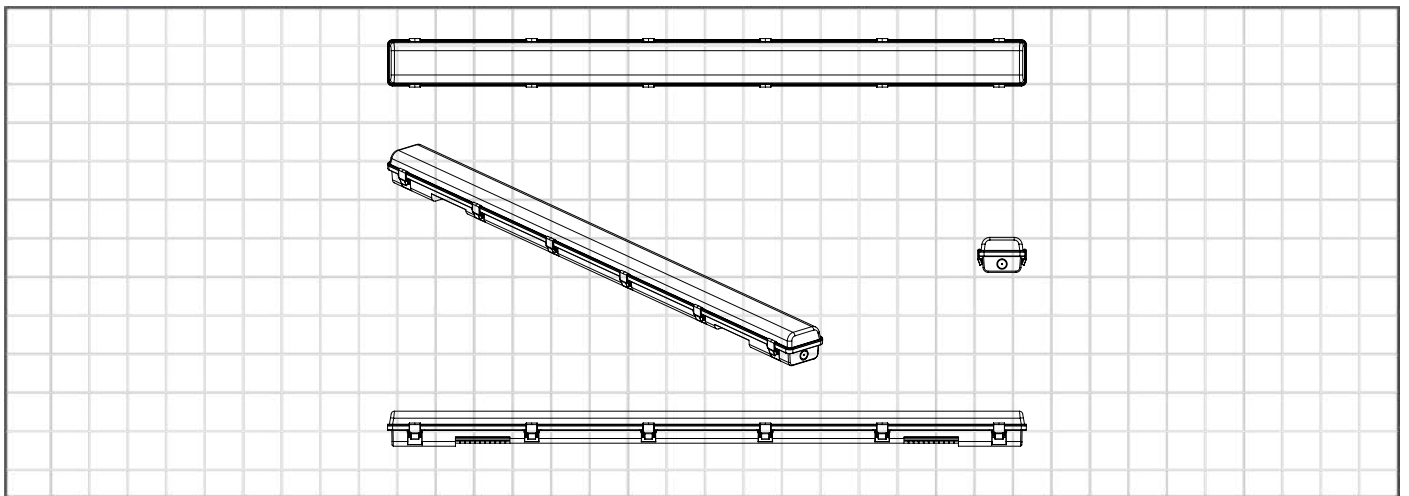

IP65



NO FLICKER

Body color



Application



Warehouse



metro



garage



tunnel



corridor



store



supermarket