


LMP135/LMP160/LMP1120

Economical Mini PA Amplifier



30W/60W/120W

- Rated power 30W/60W/120W
- Speaker output 100V&4Ω
- Portable mixer amplifier
- One AUX input and one AUX output
- Support Bluetooth, SD, USB, Aux in
- Bass and Treble tone control
- Power supply: A220V/50Hz

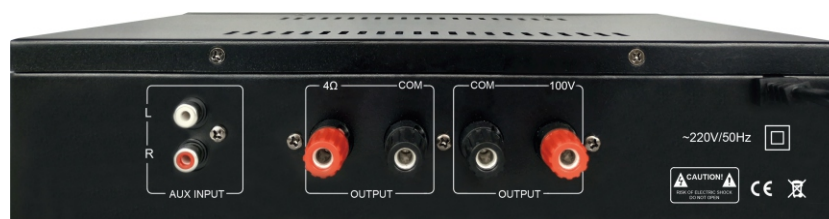

	RMS Power	Mic Input Sensitivity	AUX Input Sensitivity	SNR	THD	Frequency Response	Dimension
LMP135	30W	50±5mV	500±50mV	≥85dB	≤1% (1KHz)	80Hz-16KHz (±3dB)	187×280×65mm
LMP160	60W	50±5mV	500±50mV	≥85dB	≤1% (1KHz)	80Hz-16KHz (±3dB)	187×280×65mm
LMP1120	120W	≤3.5mV	≤280mV	≥85dB	≤1% (1KHz)	80Hz-12KHz (±3dB)	187×280×65mm